

BATTERY CHARGERS IBC & TVR SERIES




IBC SERIES

Battery chargers for light duty service, designed to meet the requirements for the majority of navigational aid power supply and similar applications where the features of the TVR series battery chargers are not required.

The IBC series chargers are available in splash proof painted steel or anodized aluminum enclosures.

Optional accessories included $\pm 2\%$ accuracy meters, a filter package for use with loads sensitive to power supply ripple and dual output single battery sensing to charge two batteries simultaneously.

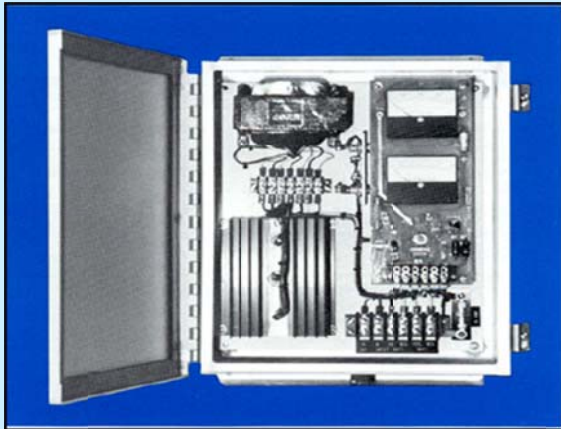

Form No.: 042611

TVR SERIES


Battery chargers are used to convert energy from an AC source into a DC level for storage in a rechargeable battery

Generally, the energy is alternating current from a commercial source or a generator. This energy is rectified to direct current at the proper voltage and fed into a battery. The chargers are constant voltage devices which regulate the current depending upon the state of charge of the battery.

As the battery discharges, more current is supplied to recharge it. Should AC power fail, the charger will not consume energy from the battery. This assures full standby service from the battery to the load.

Automatic Power chargers are solid state SCR regulated with no moving parts except meters. All components are conservatively rated and the entire charger is designed for use in the harsh maritime environment.

Some important features are currently limiting transformer and input and output protective current interrupting devices. The dual output unit senses both batteries and directs the majority of the charging current to the battery with the lowest charge. All charges can be easily converted from 115 volt AC input to 240 volt AC input.



IBC SERIES

Model	AC Input*	DC Output		Enclosure Type	Dimensions	Weight
		Volts	Max. Amps			
IBC 0612	120/240 VAC 50/60 Hz	12V	6	NEMA 12 Steel	14" x 12" x 6"	31 lbs
IBC 0612W	120/240 VAC 50/60 Hz	12V	6	NEMA 12 Aluminum	14" x 12" x 6"	31 lbs
IBC 03214	120/240 VAC 50/60 Hz	24V	3	NEMA 12 Steel	14" x 12" x 6"	31 lbs
IBC 0324W	120/240 VAC 50/60 Hz	24V	3	NEMA 12 Aluminum	14" x 12" x 6"	31 lbs

*Specify input voltage when ordering.

TVR SERIES

Model	AC Input*	DC Output		Special Features	Weight
		Volts	Max. Amps		
TVR 1012 HA	120/240 VAC 50/60 Hz	12V	10	Single Output	46 lbs
TVR 0824 HA	120/240 VAC 50/60 Hz	24V	8	Single Output	48 lbs
TVR 1012D HA	120/240 VAC 50/60 Hz	12V	10	Dual Output	46 lbs
TVR 0824D HR	120/240 VAC 50/60 Hz	24V	8	Dual Output	48 lbs

NEMA 12 or NEMA 4X Enclosures available, specify on order.

*Specify input voltage when ordering.

Specifications subject to change without notice

