





UNLIGHTED STEEL BUOYS CAN AND NUN TYPE

CAN TYPE

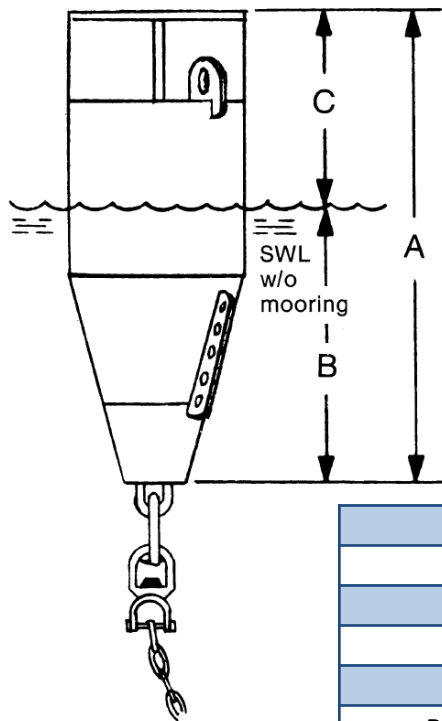

Buoy Classification

BC-3: Third Class
 BC-4: Second Class
 BC-5: First Class

	BC-3	BC-4	BC-5
Dimensions			
A	8' 0"	13' 6"	18' 3"
B	3' 9"	6' 0"	7' 9"
C	4' 3"	7' 6"	10' 6"
D	3' 0"	4' 0"	5' 0"
Recommended Moorings			
Anchor, Concrete	3000 lbs.	4000 lbs.	5000 lbs.
Chain	3/4"	1 1/8"	1 1/8"
Body Material	Steel	Steel	Steel
Day Mark	12 3/4 sq. ft.	30 sq. ft.	52 1/2 sq. ft.
Buoys can be filled with buoyant foam			
Weight Less Moorings	875 lbs.	2565 lbs.	5150 lbs.
Reserve Buoyancy	1254 lbs.	3216 lbs.	7560 lbs.
Pounds/Inch Immersion	38 lbs./in.	67 lbs./in.	105 lbs./in.
Freeboard (To Top of Can)	33"	48"	72"

Note: Standard buoy does not include mooring. Steel buoys standard finish: sandblast outside after fabrication, Dimetecote Coasting: 1 intermediate coat and 1 vinyl color coat.

**CORPORATE HEADQUARTERS
& MANUFACTURING
OPERATIONS**
Houston, TX
Phone: +1-713-228-5208
Fax: +1-713-228-3717
sales@automaticpower.com

U.S. LOCATIONS

PMAPI GULF OF MEXICO
Gray, LA
Rene "Boogie" LeBlanc
Phone: +1-985-223-8700
Fax: +1-985-223-8710
rleblanc@automaticpower.com

PMAPI WEST COAST
Novato, CA
Pete Dolan
Phone: +1-415-382-6296
Fax: +1-415-382-6299
pdolan@automaticpower.com

INTERNATIONAL LOCATIONS


AB PHAROS MARINE PTE LTD
Singapore
Phone: +65-6747-9325
Fax: +65-6746-0478
sales@pharos-api.com

**PHAROS MARINE LTD
MANUFACTURING OPERATIONS**
London, UK
Phone: +44-20-8538 1100
Fax: +44-20-8577 4170
sales@pharosmarine.com

**SIMS SYSTEMS LTD
MANUFACTURING OPERATIONS**
Great Yarmouth, UK
Phone: +44-1493 659271
Fax: +44-1493 601882
info@sims-systems.com

www.automaticpower.com

NUN TYPE

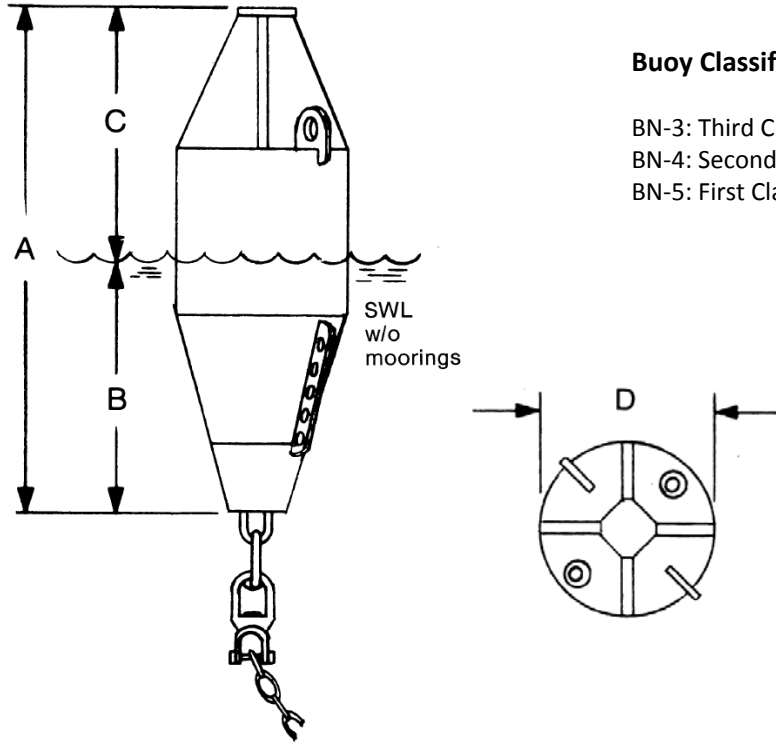

Buoy Classification

BN-3: Third Class
BN-4: Second Class
BN-5: First Class

	BN-3	BN-4	BN-5
Dimensions			
A	9' 0"	14' 6"	19' 9"
B	3' 9"	5' 11"	7' 6 1/2"
C	5' 3"	8' 7"	12' 2 1/2"
D	3' 0"	4' 0"	5' 0"
Recommended Moorings			
Anchor, Concrete	3000 lbs.	4000 lbs.	5000 lbs.
Chain	3/4"	1 1/8"	1 1/8"
Body Material	Steel	Steel	Steel
Day Mark	13 1/4 sq. ft.	27 1/2 sq. ft.	49 sq. ft.
Buoys Can be Filled with Buoyant Foam			
Weight Less Moorings	865 lbs.	2465 lbs.	4875 lbs.
Reserve Buoyancy	1254 lbs.	3283 lbs.	7822 lbs.
Pounds/Inch Immersion	38 lbs./in.	67 lbs./in.	105 lbs./in.
Freeboard (To Top of Can)	33"	49"	74 1/2"

Note: Standard buoy does not include mooring. Steel buoys standard finish: sandblast outside after fabrication, Dimetcote Coasting: 1ne intermediate coat, and 1 vinyl color coat.

*Specifications subject to change without notice.

